


# DANATRONICS

## BoresEye DC Series

Danatronics' new BoresEye DC series of articulating video probes offer unsurpassed image quality, portability, documentation and affordability. The DC series of waterproof CCD cameras are available in 5.5mm, 6.0mm, 8.0mm and 11.0mm with 2 or 4 way articulation in various lengths from 0.4M to 5M. The BoresEye can save stills and video on SD cards with easy export to your computer to document all your critical video inspections. The BoresEye also offers long battery life, a 3.5" high resolution TFT display, video output and variable lighting.

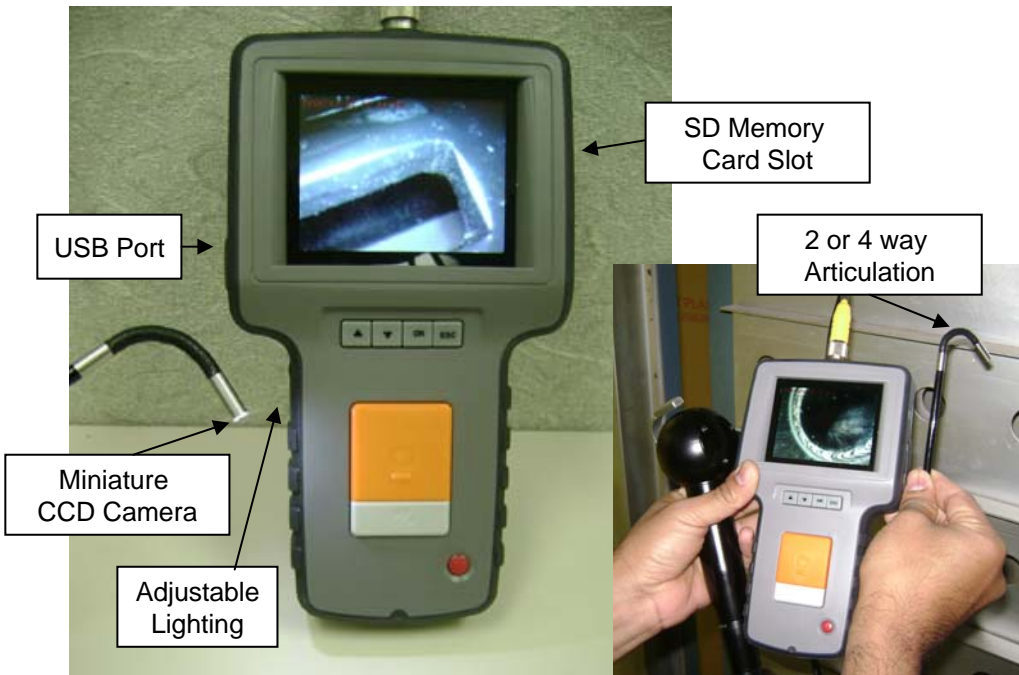

part number	articulation	diameter	working length	field of view	depth of view	outside material
DC2-5.5-.040	2 way	5.5mm	400mm (10")	70	10-100mm	stainless steel
DC2-5.5.100	2 way	5.5mm	1M	70	10-100mm	stainless steel
DC2-6-.040	2 way	6.0mm	400mm (10")	70	10-100mm	stainless steel
DC2-6-100	2 way	6.0mm	1M	70	10-100mm	stainless steel
DC4-6-100	4 way	6.0mm	1M	70	10-100mm	stainless steel
DC4-6-150	4 way	6.0mm	1.5M	70	10-100mm	stainless steel
DC4-6-200	4 way	6.0mm	2M	70	10-100mm	stainless steel
DC4-6-300	4 way	6.0mm	3M	70	10-100mm	stainless steel
DC4-6-600	4 way	6.0mm	6M	70	10-100mm	stainless steel
DC4-8-100	4 way	8.0mm	1M	70	10-100mm	stainless steel
DC4-8-200	4 way	8.0mm	2M	70	10-100mm	stainless steel
DC4-8.4-300	4 way	8.4mm	3M	70	10-100mm	stainless steel
DC4-8.4-600	4 way	8.4mm	6M	70	10-100mm	stainless steel
DC2-11-100	2 way	11mm	1M	90	10-100mm	stainless steel
DC2-11-1.080	2 way	11mm	1.8m	90	10-100mm	stainless steel
DC4-11-.060	4 way	11mm	600mm	90	10-100mm	stainless steel
DC4-11-100	4 way	11mm	1M	90	10-100mm	stainless steel
DC4-8-1.080	4 way	8mm	1.8M	70	10-100mm	stainless steel
DC4-11-400	4 way	11mm	4M	90	10-100mm	stainless steel
DC4-11-500	4 way	11mm	5M	90	10-100mm	stainless steel

## Specifications:

**Diameter:** 5,6,8,11mm

**Length:** 0.4M, 0.6M, 0.8M, 4M  
5M (see chart for complete details)

**Articulation:** 150° up, 90°  
down, left and right

**Field of view:** 70° for 5.5, 6  
and 8mm, 90° for 11mm  
(see chart)

**Depth of Field:** 10-100mm  
(see chart)

**Insertion tube:** Stainless  
Steel (outside material)

**Illumination:** New micro LED  
with variable intensity  
adjustment

**Display:** 3.5 TFT LCD

**Outputs:** Mini USB 1.1 AV out

**Power:** DC 5V

**Battery:** Rechargeable,  
Lithium Ion, 2-3 Hrs  
depending on lighting

**Recording Media:** SD Card  
up to 2G

### Still Image Storage

**Format:** JPEG (640x480  
....full VGA), or video files  
as ASF (320x240...1/4  
VGA) for playing on  
Windows Media Player

**For Pricing,**

**Please Contact us:**

**Danatronics, Corporation**  
14 Electronics Avenue  
Danvers, MA 01923  
1-866-908-6100